




ReliaG® Pro Series

MODEL 2028

Belt or Chain Drive
Garage Door Opener

ALWAYS AT YOUR COMMAND

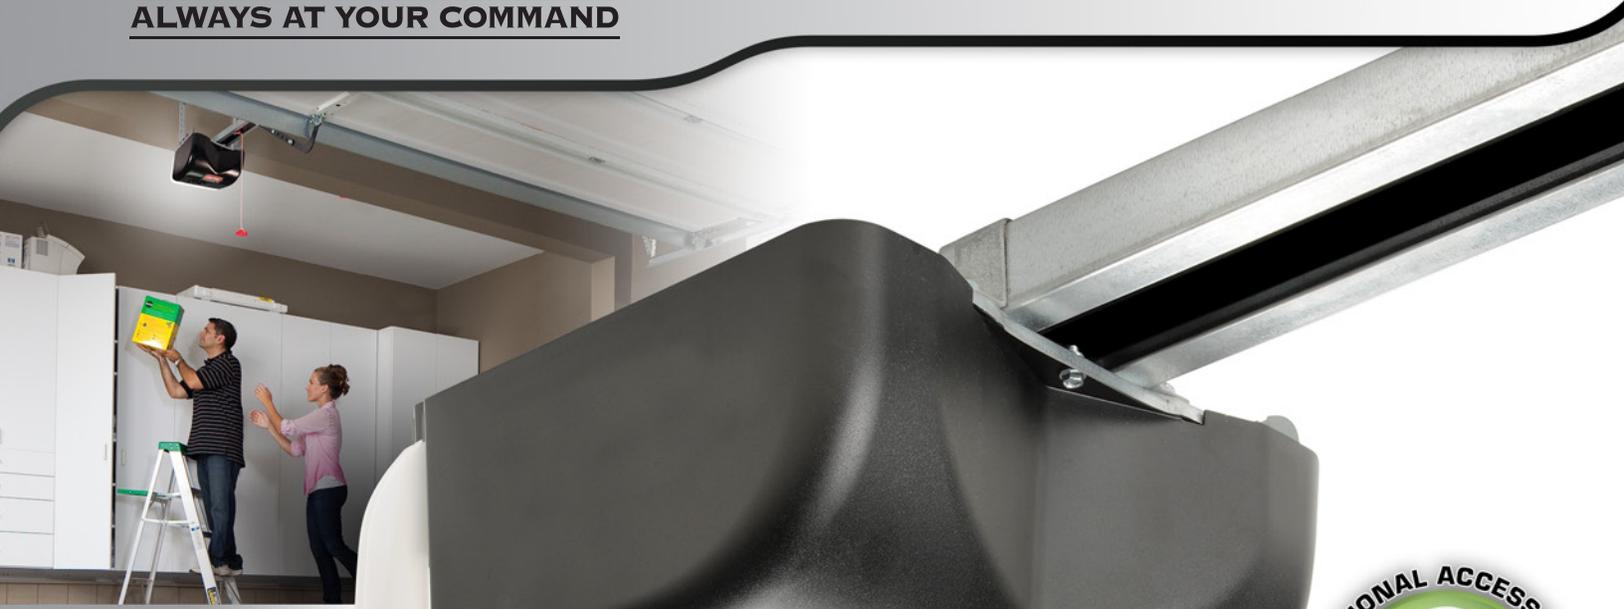

Featuring 1/2 HPC*
Power Plus Motor

Highlights

- **Durable Performance** – The DC motor operates most residential sectional doors weighing up to 500 lbs. and up to 8' high.
- **Soft Stop / Soft Start Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Dependability** – The quality built into a Model 2028 is backed by a 10-year Limited Warranty[†] for the motor and 15 years for the belt drive rail (5 years for the chain drive rail).
- **Smart Illumination Lighting** – The light bulb is positioned toward the inside of the garage instead of on the door for light where you need it most.
- **GenieSense™ Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.



THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage? Genie — Always at Your Command!

* Horsepower comparable (HPC) Power Plus designates this garage door opener exceeds Genie's lifting force specification for 1/2 horsepower garage door openers.
† Limited non-transferable warranty. See Operation & Maintenance manual for details.

MODEL 2028



Standard Equipment & Warranty

SAFETY BEAMS	WALL CONSOLE	3-BUTTON REMOTE	GENIE 10 YEAR LIMITED WARRANTY	GENIE 15 YEAR LIMITED WARRANTY	GENIE 5 YEAR LIMITED WARRANTY	GENIE 1 YEAR LIMITED WARRANTY
			MOTOR AND GEARBOX*	RAIL [†] (BELT DRIVE)	RAIL [†] (CHAIN DRIVE)	PARTS & ACCESSORIES*

Features & Benefits

POWER & CONTROL

DC Motor Smart Technology – The DC motor with a 1/2 HPC* Power Plus rating offers quiet performance. The DC motor also gives the ability to integrate Soft Start/Soft Stop control, meaning the door begins and ends its travel smoothly instead of abruptly. This also helps create less noise and less wear and tear on your door.

C-Channel Rail – Strong rail design helps promote durability and safety. Also conceals the belt (or chain) for better appearance.

Belt or Chain Drive – Choose the belt drive option for quieter operation or chain drive for economical value.

SAFETY

Safe-T-Beam® Non-Contact Reversing System – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

SECURITY

Intellicode® Access Security System – Genie's superior encryption technology prevents piracy of the radio signal that operates your door by always selecting a new code from billions of combinations each time the opener is operated.

Sure-Lock™ Control – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

CONVENIENCE

Smart Illumination – Light bulb is positioned toward inside of garage instead of toward door for light where it's needed most. Light stays on for 4 minutes once opener is activated for ample time to get into house. Opener uses incandescent (60-watt max bulb) or most LED & CFL bulbs. (See Genie LED bulb this page for additional option.)

Auto Seek Dual Frequency – The internal system automatically uses either the 315 or 390 MHz frequency produced by the remote control or keypad to help ensure the opener responds regardless of potential nearby frequency interference, such as military base equipment.

Pre-Programmed Remote – Ready to use out-of-the-box with simple steps to change the programming if so desired.

HomeLink® & Car2U® Compatibility – Works with current and ALL previous versions of HomeLink or Car2U.

6' Power Cord (Model 2028H) – Upgrade from standard 4' power cord.

Genie Professional Line Ratings

TriloG® Pro Series	Best
IntelliG® Pro Series	Better
ReliaG® Pro Series	Good

*Horsepower comparable (HPC) Power Plus designates this garage door opener meets Genie's lifting force specification for 1/2 horsepower garage door openers.
 † Limited non-transferable warranty. See Operation & Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660
 1.800.35.GENIE (354-3643) • www.GenieCompany.com
 Item G001.0184 Rev. 09/16



Convenience Options

Genie® Garage Door Opener LED Bulb - NEW!

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



Aladdin Connect™ Garage Door Controller

Gives ability to remotely monitor and change the position of your garage door from almost any smart device. The controller provides security and convenience. You'll be able to know when someone is operating your door, or close it if your door status shows you left it open. You can even open it for a relative, babysitter, delivery, or repair person. Up to 3 doors can be monitored and 20 users added with one system.



Wireless Keypad

Mounts outside your door to give you keypad code access to your garage. Back-lit keypad lets you easily see the numbers. Controls up to 3 openers.



Choose a color for the flip-up cover that best complements your home.



1-Button Remote

If the remote only needs to operate one opener, you may want our simple, easy-to-use one-button remote. Also features Auto Seek Dual Frequency just as the standard 3-button remote does.



GenieMaster® Remote

This versatile remote control works with all Genie gated community receivers as well as most Genie openers ever made, including Genie 390 MHz remotes on 9-switch, 12-switch, and 9-switch trinary formats. It also is compatible with those models that have Auto Seek Dual Frequency.



YOUR GENIE PROFESSIONAL DEALER:

© 2016 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Closed Confirm, and the Genie logo are registered trademarks and Genie-Net, TriloG, and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation.