



ALWAYS AT YOUR COMMAND

TriloG<sup>™</sup> Pro Series

# MODEL 4064

Direct Screw Drive  
Garage Door Opener



Featuring 1 $\frac{1}{4}$  HPc\* Motor

## Highlights

- **Powerful, fast performance** – Patented direct screw drive rail combined with powerful 140 volt DC motor provides maximum power and an opening speed of 12.0" per second\*\* to quickly open even the heaviest doors.
- **Soft Stop / Soft Start Control** – DC technology allows your door to begin and end its movement smoothly instead of abruptly whenever you operate it, creating less noise and less wear on the door.
- **Big Door Capable** – For use on residential sectional doors up to 14' high and one-piece doors up to 8' high.
- **Maintenance-Free Direct Drive System** – Self-lubricating screw drive rail requires no maintenance under normal operating conditions.
- **Assembled in the U.S.A.**
- **Dependability** – A Limited Lifetime warranty<sup>†</sup> on the motor and screw drive rail shows how confident Genie is that your opener will perform when you need it to for years to come.
- **Power on Demand** – Refers to the ability of the opener to continually monitor the door's travel and deliver just the right amount of power for smooth and consistent movement.
- **GenieSense<sup>™</sup> Monitoring** – Automatic force profiling and diagnostic technology improves safety by stopping operation when significant changes occur.
- **GENIE-NET<sup>™</sup>** – Intelligent internal platform allows the opener to expand its capability with great optional accessories.




THE GENIE STORY: Genie has a rich history in developing garage door openers that feature reliability, strength, safety, security, and convenience. Since 1954, Genie has produced millions of openers that serve millions of satisfied homeowners every day of every year. Shouldn't you have one in your garage?

Genie — Always at Your Command!

\* Horsepower comparable (HPc) designates this garage door opener meets Genie's lifting force specification for 1 $\frac{1}{4}$  horsepower garage door openers.  
\*\* +/- 0.5 inches per second. Speed will slow with one-piece doors.  
† Limited non-transferable warranty. See Operation and Maintenance manual for details.



## Standard Equipment & Warranty

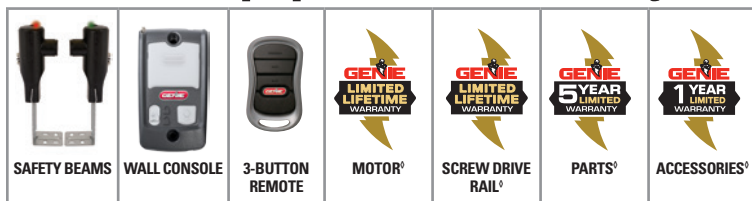

## Features & Benefits

### POWER & CONTROL

**DC Motor Smart Technology** – The 140 volt DC motor with its 1 1/4 HPC\* rating offers powerful performance. The DC motor also allows for Soft Start/Soft Stop control so the door begins and ends its travel smoothly instead of abruptly. This helps create less noise and less wear and tear on your door.

**Screw Drive Design** – Patented screw drive rail offers incredibly strong lifting force that allows the opener to lift residential sectional doors up to 14' high! By eliminating the gearbox used on belt and chain models, the screw drive design increases reliability since fewer parts means less chance for potential breakdown.

**C-Channel Rail** – Strong rail design helps promote durability and safety. Also conceals the screw drive rod for better appearance.

**Speed** – Opening speed of 12.0 inches/second\*\* gets you on your way faster.

### SAFETY

**Safe-T-Beam® Non-Contact Reversing System** – When objects pass through the infrared beam, the garage door automatically stops closing and reverses open without having to make physical contact with the door.

### SECURITY

**Intellicode® Access Security System** – Genie's superior encryption technology prevents piracy of the radio signal that operates your door by always selecting a new code from billions of combinations each time the opener is operated.

**Sure-Lock™ Control** – Allows you to lock out remote controls and wireless keypad at any time for increased security – also known as a vacation lock.

### CONVENIENCE

**Motion Detector Lighting** – Turns lights on automatically when you enter the garage for superior convenience and security. Lights stay on for 4 minutes once you exit garage or no motion is detected.

**Smart Illumination** – Light bulbs are positioned toward inside of garage instead of toward door for light where it's needed most. Opener uses incandescent (100-watt max per bulb) or most LED and CFL bulbs. (See Genie LED bulb this page for additional option.)

**Auto Seek Dual Frequency** – The system automatically uses 315 or 390 MHz frequency produced by the remote or keypad to help ensure the opener responds regardless of nearby frequency interference, such as military base equipment.

**Pre-Programmed Remote** – Ready to use out-of-the-box with simple steps to change the programming if so desired.

**HomeLink® & Car2U® Compatibility** – Works with current and ALL previous versions of HomeLink or Car2U.

**6' Power Cord (Model 4064H)** – Upgrade from standard 4' power cord.

#### Genie Professional Line Ratings

**TriloG® Pro Series** Best  
**IntelliG® Pro Series** Better  
**ReliaG® Pro Series** Good



## Convenience Options

### Genie® Garage Door Opener LED Bulb - NEW!

Common LED and CFL bulbs can emit interference to limit the range of garage door remotes. Incandescent light bulbs can have their lives shortened by vibration associated with opener operation. The Genie LED bulb solves these and other problems to ensure the garage door opener light doesn't leave your garage in the dark!



### Aladdin Connect™ Garage Door Controller

Gives ability to remotely monitor and change the position of your garage door from almost any smart device. The controller provides security and convenience. You'll be able to know when someone is operating your door, or close it if your door status shows you left it open. You can even open it for a relative, babysitter, delivery, or repair person. Up to 3 doors can be monitored and 20 users added with one system.



### Wireless Keypad

Mounts outside your door to give you keypad code access to your garage. Back-lit keypad lets you easily see the numbers. Controls up to 3 openers.



Choose a color for the flip-up cover that best complements your home.




### Battery Back-Up

Operates a garage door up to 50 cycles in a 24-hour period after the initial power outage.



## GENIE-NET™ PLATFORM

Genie-Net is the intelligent platform built into TriloG™ and IntelliG® Pro Series openers. When the **Network Adapter** is connected to one of the openers, it allows it to work with two great accessories. The **Closed Confirm® remote** notifies you when the door shuts by emitting a beep and flashing a green light. If the door reverses open, a warning tone sounds and a red light flashes. The **Intelligent Wall Console** features a back-lit LCD screen that provides easy-to-read info including date and time.

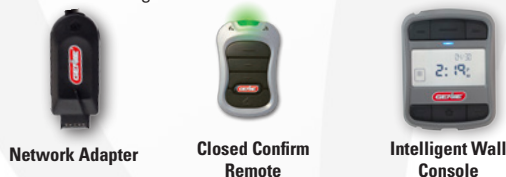

YOUR GENIE PROFESSIONAL DEALER:

\* Horsepower comparable (HPC) designates this garage door opener meets Genie's lifting force specification for 1 1/4 horsepower garage door openers.

\*\* +/- 0.5 inches per second. Speed will slow with one-piece doors.

† One cycle is a complete open and close of the door; testing performed at room temperature.

‡ Limited non-transferable warranty. See Operation & Maintenance manual for details.



The Genie Company • One Door Drive, Mt. Hope, Ohio 44660

1.800.35.GENIE (354-3643) • [www.GenieCompany.com](http://www.GenieCompany.com)

Item G001.0160 Rev. 09/16

© 2016 The Genie Company. Genie, IntelliG, ReliaG, Safe-T-Beam, Intellicode, Closed Confirm and the Genie logo are registered trademarks and Genie-Net, TriloG and Sure-Lock are trademarks of GMI Holdings, Inc., d/b/a The Genie Company. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. HomeLink is a registered trademark of Gentex Corporation. Car2U is a registered trademark of Lear Corporation.